



## Source Manufacturer JK130-020 Domestic Plug-In Fuse Spot PTC Self-Recovery Fuse

Our Product Introduction

### Basic Information

- Place of Origin: China
- Brand Name: LINKUN
- Certification: RoHS
- Model Number: JK130
- Minimum Order Quantity: 1000PCS
- Price: US \$0.2 ~ 0.6 PCS
- Packaging Details: 1000PCS/Bag
- Delivery Time: 5-7 days
- Payment Terms: T/T, D/P, D/A, Western Union, MoneyGram
- Supply Ability: 100,000 pieces/month




### Product Specification

- Application: Overcurrent Protection
- Voltage: Miniature
- Voltage Characteristics: Safety Voltage
- Shape: Plug-in Type
- Fusing Speed: M/Medium Speed
- Implementation Standard: National Standard
- Automatic Reset Function: Yes
- Maximum Voltage: 130 (V)
- Maximum Current: 3 (A)
- Holding Current: 0.2 (A)
- Operation Temperature: 25 (°C)
- Temperature Control Range: -40°C+85 (°C)
- Application Area: Automotive Electronics
- Highlight: Source Manufacturer PTC Self-Recovery Fuse, JK130-020 PTC Self-Recovery Fuse



### More Images



for more products please visit us on [lk-thermistor.com](http://lk-thermistor.com)

## Product Description

### Polymer PTC Resettable Fuse JK130 Series

#### Features:

Radialleaded Devices

Cured, flame retardant epoxy polymer insulating material meets UL94V-0

RoHS compliant and lead-free



#### Product Dimensions




Fig.1




Fig.2

Unit :mm

Model	Dimensions(mm)				Lead material	Shape
	A(max)	B(max)	C(max)	D(typ)	Tinned metal(mm)	Fig
JK130-010	7.4	12.7	3.8	5.1	22AWG/Φ0.6	1
JK130-015	7.4	13.0	3.8	5.1	22AWG/Φ0.6	1
JK130-017	7.4	13.5	3.8	5.1	22AWG/Φ0.6	1
JK130-020	7.6	13.5	3.8	5.1	22AWG/Φ0.6	1
JK130-025	7.6	13.5	3.8	5.1	22AWG/Φ0.6	1
JK130-030	8.0	14.0	3.8	5.1	22AWG/Φ0.6	1
JK130-040	9.4	15.0	3.8	5.1	22AWG/Φ0.6	1
JK130-050	10.2	15.2	3.8	5.1	22AWG/Φ0.6	1
JK130-065	12.8	18.0	3.8	5.1	22AWG/Φ0.6	1
JK130-075	12.8	18.0	3.8	5.1	22AWG/Φ0.6	1
JK130-090	14.5	19.6	3.8	5.1	20AWG/Φ0.8	2
JK130-110	16.3	21.3	3.8	5.1	20AWG/Φ0.8	2
JK130-135	17.0	22.0	3.8	5.1	20AWG/Φ0.8	2
JK130-160	20	25	3.8	5.1	20AWG/Φ0.8	2
JK130-185	22	23	3.8	5.1	20AWG/Φ0.8	2
JK130-200	25	27	3.8	10.2	20AWG/Φ0.8	2
JK130-250	27	32	3.8	10.2	20 AWG/Φ0.8	2

Note: Dimensions in the A, B, C are the maximum sizes, all typical values of D is at the tolerance of  $\pm 0.75\text{mm}$ .

#### Thermal Derating Chart-IH(A)

Model	Maximum ambient operating temperatures( $^{\circ}\text{C}$ )									
	-40 $^{\circ}\text{C}$	-20 $^{\circ}\text{C}$	0 $^{\circ}\text{C}$	25 $^{\circ}\text{C}$	30 $^{\circ}\text{C}$	40 $^{\circ}\text{C}$	50 $^{\circ}\text{C}$	60 $^{\circ}\text{C}$	70 $^{\circ}\text{C}$	85 $^{\circ}\text{C}$
JK-130 series	147%	132%	118%	100%	90%	85%	76%	67%	60%	47%

#### Electrical Characteristic

Model	IH(A)	I <sub>T</sub> (A)	Vmax(V)	Imax(A)	Pd(W)	Maximum Time-to-trip		Resistance( $\Omega$ )	
						Current (A)	Time(S)	Rmin- Rmax	R1max
JK130-010	0.10	0.20	130	3	0.8	0.5	6	2.5-9.0	20
JK130-015	0.15	0.30	130	3	0.8	0.75	5.5	2.5-7.5	18
JK130-017	0.17	0.34	130	3	0.8	0.85	5.2	1.5-7.0	16
JK130-020	0.20	0.40	130	3	0.8	1.0	5.0	1.9-4.0	12
JK130-025	0.25	0.50	130	3	1.0	1.25	4.8	1.45-3.50	6.0
JK130-030	0.30	0.60	130	3	1.0	1.5	4.5	1.0-3.0	5.0
JK130-040	0.40	0.80	130	3	1.0	2.0	4.5	0.75-2.0	4.0

JK130-050	0.50	1.0	130	3	1.0	2.5	5.0	0.50-1.60	3.5
JK130-065	0.65	1.3	130	10	1.0	3.25	5.2	0.45-1.0	2.0
JK130-075	0.75	1.5	130	10	1.0	3.75	5.5	0.40-0.90	2.0
JK130-090	0.90	1.8	130	10	1.5	4.5	5.8	0.30-0.70	1.5
JK130-110	1.10	2.2	130	10	1.8	5.5	6.3	0.20-0.65	1.2
JK130-135	1.35	2.7	130	10	1.8	6.75	7.5	0.15-0.60	1.2
JK130-160	1.60	3.2	130	10	2.0	8.0	8	0.10-0.50	1.0
JK130-185	1.85	3.7	130	10	2.0	9.25	9	0.10-0.40	0.80
JK130-200	2.00	4.0	130	10	2.2	10.0	10	0.10-0.30	0.50
JK130-250	2.50	5.0	130	10	2.5	12.5	12	0.05-0.25	0.45

$I_H$ =Hold current:maximum current at which the device will not trip at 25°C still air.

$I_T$ =Trip current:minimum current at which the device will nalways at 25°C still air.

$V_{max}$ =Maximum voltage device can withstand without damage at rated current.

$I_{max}$ =Maximum fault current device can withstand tithout damage at rated voltage.

$T_{trip}$ =Maximum time to trip(s) at assigned current.

$P_d$ =Typical power dissipation:typical amount of power dissipated by the decice when in state air environment.


$R_{min}$ =Minimum device resistance at 25°C prior to tripping.

$R_{max}$ =Maximum device resistance at 25°C prior to tripping.

### Environmental Specifications

Test	Conditions	Resistance change
Passive aging	+85°C,1000hrs	±8% typical
Humidity aging	+85°C,85%R.H.1000hrs	±8% typical
Thermal shock	+125°C to -55°C,10times	±12% typical
Resistance to solvent	MIL-STD-202,Method 215	No change
Vibration	MIL-STD-202,Method 201	No change

### Solder reflow conditions

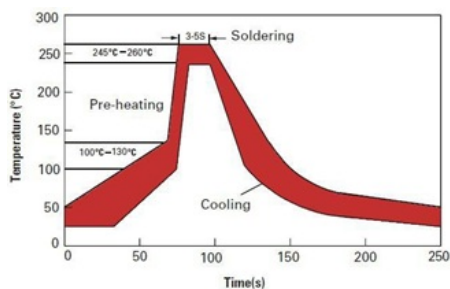

### Wave Soldering:

Soldering Temperature:260°C~270°C Soldering Time:≤3sec.

Soldering Position: Resettable fuse wire and the bottom ≥ 6mm.

### Manual soldering:

Soldering Temperature:250°C~280°C Soldering Time: ≤3sec.

Soldering Position: Resettable fuse wire and the bottom ≥ 6mm.

### Packaging and Storage

#### Packaging

JK130-010 JK130-065 1000Pcs/Bag

JK130-075 JK130-200 500 Pcs/Bag

#### Storage

The maximum ambient temperature shall not exceed 40°C.Storage temperatures higher than 40°C could result in the deformation of packaging materials.The maximum relative humidity recommended for storage is 70%.High humidity with high temperature can accelerate the oxidation the oxidation of the solder plating on the termination and reduce the solderability of the components.sealed plastic bags with desiccant shall be used to teduce the oxidation of the termination and shall only be opened prior to use.the products shall not be stored in areas where harmful gases containing sulfu of chlorine are present.

### Warning:

Please read this specification before use the product.

Using of this product must be sure to follow the requirement of this specification,operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and flame.

PPTC resettable fuses are intended for occasional over current protection. Application for repeated over current condition or prolonged trip are not anticipated.

Please avoid contact of PPTC resettable fuses with chemical solvent. Prolonged contact will damage the device performance. You are requested not to use our product deviating from the agreed specifications.



**Dongguan Linkun Electronic Technology Co., Ltd.**



13423305709



huangju@lk-ptc.com



lk-thermistor.com

Room 101, No. 21, Huayuanzai Road, Chongmei, Chashan Town, Dongguan City, Guangdong Province