



R1032T SMD Fuse T2A Surge Protection Fuse PD Fast Charging Power Supply Lithium Battery Protection Board

Our Product Introduction

for more products please visit us on lk-thermistor.com

Basic Information

- Place of Origin: Dong Guan China
- Brand Name: lin kun
- Certification: ROHS,UL
- Model Number: R1032T
- Minimum Order Quantity: 5000 PCS
- Price: 0.045 USD/ PCS
- Packaging Details: Bulk,500pcs per polybag
- Delivery Time: 7 workdays
- Payment Terms: T/T
- Supply Ability: 20,000,000PCS per week



Product Specification

- Type: Chip Fuse
- Application: Consumer Electronics, Mobile Devices, Household Appliances, Lighting Appliances, Power Supplies And Adapters, Communication Equipment
- Size: Miniature
- Voltage Characteristics: Safety Voltage
- Shape: Chip Type
- Fusing Speed: T/slow
- Implementation Standard: European Standard
- Automatic Reset Function: None
- Maximum Voltage: 250 (V)
- Maximum Current: 2A (A)
- Holding Current: 2A (A)
- Operation Temperature: 25-85 ()
- Temperature Control 40 ()



More Images



Product Description

R1032 series,surface Mount fuse Time-Lag32V/63V1 72V/100V/125V/250V/350V/400v

Descriptions:

REOMAX R1032 series slow-blow square Surface Mount fuses are ceramic tubelend cap constructions,RoHScompliant,Halogen Free and lead(Pb) exempts of the requirements of RoHS Directive(2002/95/EC), with U.S.(ULCSA) safety agency approvals. Provide board level primary and secondary circuit protection in a wide varietyof applications.With excellent inrush current withstanding capability, excellent reliability for thermal and mechanicshock, also have a high reliability and stable solder ability, end caps are available in gold/silver/nickel plated.

Features:

Time-Lag (Slow-Blow)
 Small size(6.1mm*2.5mm)
 Wide range of current rating available
 Wide operating temperature range
 Low temperature de-rating
 RoHS compliant
 Tape and Reel for automatic placement ·
 Conflict free metals

Applications:


LED lighting
 Notebook PC
 Battery devices
 LCD/PDP devices
 LCD backlight inverter
 Portable Devices
 Power supply
 Networking devices
 PC server
 Cooling fan system
 Storage system
 Telecom system
 Wireless base station
 White goods
 Game console
 Office equipment
 Digital camera
 Industrial equipment· Medical equipment
 Automotive devices

Catalog Number	Ampere Rating(A)	Voltage Rating(V)	Interrupting Rating
R1032.***	0.050	32V	1000A@32V
	0.062		
	0.080		
	0.100		
	0.125		
	0.200		
R1032F.***	0.250	63V	150A@63V/72/100V/125V
	0.300	72V	
R1032T.***	0.375	100V	50A@350V/400V
	0.400	125V	
	0.500	250V	
	0.600	350V	
	0.630	400V	
	0.700		
	0.750		
	0.800		
	1		
	1.25		
1.5			
2			

Catalog Number	Ampere Rating(A)	Voltage Rating(V)	Interrupting Rating
R1032.***	2.5	32V	1000A@32V
	3		
	3.15		
	3.5		
	4		
	5		
R1032F.***	6	63V	150A@63V/72/100V/125V
	6.3	72V	
R1032T.***	7	100V	50A@350V/400V
	7.5	125V	
	8	250V	
	10	350V	
	12	400V	
	15		
	20		
	25		
	30		
	40 *		

Dimensions and Structure

Unit: mm

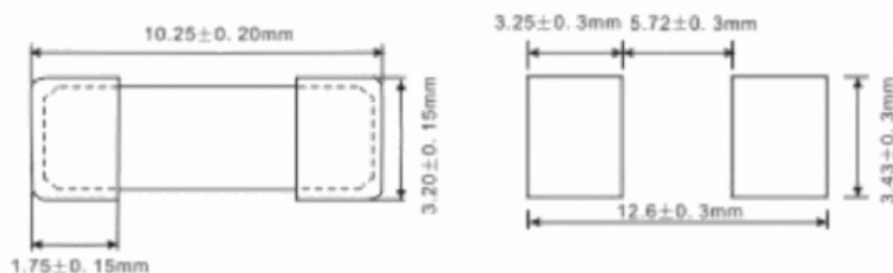

MaterialsBody:

ceramic

End caps: Copper or Silver plated brass Fuse element: Alloy wire

Packaging

2,000 pcs per reel



Dongguan Linkun Electronic Technology Co., Ltd.



13423305709



huangju@lk-ptc.com



lk-thermistor.com

Room 101, No. 21, Huayuanzai Road, Chongmei, Chashan Town, Dongguan City, Guangdong Province