



Customized Automotive Grade PT100 Temperature Sensor 500C Three-Wire Thermocouple With Lead Wire Waterproof Oil-Proof

Our Product Introduction

for more products please visit us on lk-thermistor.com

Basic Information

- Place of Origin: Dong Guang
- Brand Name: LinKun
- Certification: UL ROHS
- Model Number: PT100 PT1000
- Minimum Order Quantity: 500
- Price: 2.55
- Supply Ability: 100000



Product Specification

- Specification: PT100/PT1000
- Temperature Range: -50°C-500°C
- Sensor Type: Platinum Resistance
- Accuracy: $\pm 0.5^{\circ}\text{C}$
- Probe Type: Tubular, Thread, Ring Lug, Flange Etc Customizable
- Probe Diameter: 3mm, 5mm, 6mm Etc Customizable
- Probe Length: 30mm, 50mm, 100mm Etc Customizable
- Application: Car
- Resistance Value: Custom
- Insulation Resistance: $\geq 100\text{M}\Omega$
- Operating Temperature: -20°C~80°C
- Lead Wire: PVC, XLPE,
- Lead Material: Tinned Copper
- Free Sample: Yes




More Images



Product Description

PT100 Temperature Sensor

1, Shape Dimensions(Unit: mm)

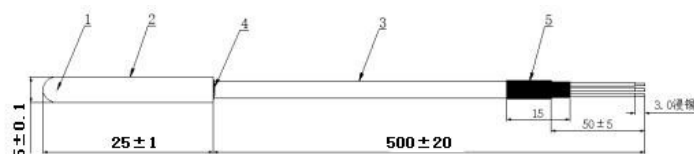

2,Component

NO	Part No	Definition	Quantity
1.	PT 100	PT100-3850	1PCS
2.	Casing	Copper nickel-plated round tube, round head, Ø5*25mm	1PCS
3.	Wire	Metal three-core high temperature glass fiber shielded wire 500°C	1PCS
4.	Epoxy	High temperature potting epoxy resin (aerospace glue)	--
5.	Pipe	White heat shrink tubing Φ3.0*15 125°C	1PCS

3,Electric Feature

Part	Items	Measure methods	Min	Nominal	Max	Unit
3-1.	Resistance at 0°C	Ta=0±0.05°C PT≤0.1mw	/	100	/	Ω
3-2.	Tcr	0.3-1mA	/	3850PPM/K	/	k
3-3.	Insulation test	DC100V ≥ 100M Ω /20°C	100	/	/	MΩ
3-4.	Hi-pot Test	1500V AC/2mA/60S	No breakdown			
3-5.	Operating temperature range	/	-50	/	500	°C

4,Maximum Ratings

Part	Items	Min	Nominal	Max	Unit
4-1.	Wire Operating Temperature Range	-50	/	500	°C
4-2.	PT Operating Temperature Range	-70	/	500	°C
4-3.	Waterproof test	IP66	/	/	IP

5,Naming Rule

PT	100	- 3850 -	152	G	01
①	②	③	④	⑤	⑥

①	Type Code	PT temperatwre sensor
②	Resistance at 0°C	100Ω
③	Tcr	3850PPM/K
④	Wire Length	152=15*102=1500mm
⑤	Package Type/Temperature terminal type	D-epoxy plastic sealing type, B-locking type, C-bullet type, E-flange type, F-thread type, G-straight tube type, H-casing type, I-cap spring type, J-combination type, K-special type
⑥	The product type	Factory Internal Code

6,Mechanical Properties

Part	Items	Criteria	Test Methods
6-1.	Tensile Test	No Crack Between Epoxy And Wire, No Deformation, No Break	30N, 10S
6-2.	Drop Test	No Visible damage	Free Falling At The Height Of 1 Meter, 5 times

7,Reliability Test

Part	Items	Criteria	Test Methods
7-1.	Storage in dry heat	$\Delta R/R25 \leq \pm 2\%$ No visible damage	500 $\pm$ 3°C, 1000 $\pm$ 24h
7-2.	Storage in coldness	$\Delta R/R25 \leq \pm 2\%$ No visible damage	-50 $\pm$ 3°C, 1000 $\pm$ 24h
7-3.	Storage in damp, heat ,steady state	$\Delta R/R25 \leq \pm 2\%$ No visible damage	50 $\pm$ 2°C, 90%-95%RH, 1000 $\pm$ 24h
7-4.	Thermal shock	$\Delta R/R25 \leq \pm 2\%$ No visible damage	— 40°C $\times$ 30min $\rightarrow$ 500°C $\times$ 30min 10 10 times

8,Product use conditions

- 1)The maximum service temperature of product use, the maximum power to wait, all in accordance with the specification requirements homework, shall not exceed the scope of specification
- 2)Product mobile, installation must be handled with care not pulling force
- 3)Cap occur deformation, oxidation etc. Phenomenon, do not use, so as not to affect the temperature accuracy)
- 4)Product appearance found deformation, breakage, do not use, lest affect performance
- 5)Avoid from exceeding radical temperature change, which is beyond operation temperature range
- 6)Do not add excessive vibration shocking pressure
- 7)Avoid from excessive pulling and bending of the lead wire)
- 8)Do not use in corrosiveness gas atmosphere (CO₂, NH₃, SO_x, NO_x) beyond the designated condition.) Do not use at the place where the sensor touches the electrolytic, brine, acid, alkaline and organic solvent beyond the designated condition)
- 9)As far as possible avoid using in water, high humidity and other have rot environment.
- 10)Through the negative temperature coefficient temperature sensor current will cause element own fever and produce measurement error, therefore need before use this factor into consideration.)
- 11)In extreme temperatures, the product can be short-term bear too high or too low temperature impact, but do not put product at extreme temperatures for a long time, in order to avoid shortening the service life of products.)
- 12) If heat shrinkable tube is needed in the process, it is not allowed to use hair dryer to blow the heat shrinkable tube. It is suggested that heat shrinkable tube should be put into a constant temperature oven and the heat-shrinkable tube should be shrunk at 110°C /10-12min.

9, R-T table 100Ω

Temperature (°C)	Resisatnce (Ω)	Resisatnce Deviation (+/-Ω)	Temperature Deviation (+/- K)
-70	72.33	0.26	0.65
-69	72.73	0.26	0.65
-68	73.13	0.26	0.64
-67	73.53	0.25	0.64
-66	73.93	0.25	0.63
-65	74.33	0.25	0.63
-64	74.73	0.25	0.62
-63	75.13	0.25	0.62
-62	75.53	0.24	0.61
-61	75.93	0.24	0.61
-60	76.33	0.24	0.60
-59	76.73	0.24	0.60
-58	77.12	0.23	0.59
-57	77.52	0.23	0.59
-56	77.92	0.23	0.58
-55	78.32	0.23	0.58
-54	78.72	0.23	0.57
-53	79.11	0.22	0.57
-52	79.51	0.22	0.56
-51	79.91	0.22	0.56
-50	80.31	0.22	0.55
-70	72.33	0.26	0.65
-69	72.73	0.26	0.65

-68	73.13	0.26	0.64
-67	73.53	0.25	0.64
-66	73.93	0.25	0.63
-65	74.33	0.25	0.63
-64	74.73	0.25	0.62
-63	75.13	0.25	0.62
-62	75.53	0.24	0.61
-61	75.93	0.24	0.61
-60	76.33	0.24	0.60
-59	76.73	0.24	0.60

-58	77.12	0.23	0.59
-57	77.52	0.23	0.59
-56	77.92	0.23	0.58
-55	78.32	0.23	0.58
-54	78.72	0.23	0.57
-53	79.11	0.22	0.57
-52	79.51	0.22	0.56
-51	79.91	0.22	0.56
-50	80.31	0.22	0.55
-49	80.70	0.22	0.55
-48	81.10	0.21	0.54
-47	81.50	0.21	0.54
-46	81.89	0.21	0.53
-45	82.29	0.21	0.53
-44	82.69	0.21	0.52
-43	83.08	0.20	0.52
-42	83.48	0.20	0.51
-41	83.87	0.20	0.51
-40	84.27	0.20	0.50
-39	84.67	0.20	0.50
-38	85.06	0.19	0.49
-37	85.46	0.19	0.49
-36	85.85	0.19	0.48
-35	86.25	0.19	0.48
-34	86.64	0.19	0.47
-33	87.04	0.18	0.47
-32	87.43	0.18	0.46
-31	87.83	0.18	0.46
-30	88.22	0.18	0.45
-29	88.62	0.18	0.45
-28	89.01	0.17	0.44
-27	89.40	0.17	0.44
-26	89.80	0.17	0.43
-25	90.19	0.17	0.43
-24	90.59	0.17	0.42
-23	90.98	0.16	0.42
-22	91.37	0.16	0.41
-21	91.77	0.16	0.41

-20	92.16	0.16	0.40
-19	92.55	0.16	0.40
-18	92.95	0.15	0.39
-17	93.34	0.15	0.39
-16	93.73	0.15	0.38
-15	94.12	0.15	0.38
-14	94.52	0.15	0.37
-13	94.91	0.14	0.37
-12	95.30	0.14	0.36
-11	95.69	0.14	0.36
-10	96.09	0.14	0.35
-9	96.48	0.14	0.35
-8	96.87	0.13	0.34
-7	97.26	0.13	0.34
-6	97.65	0.13	0.33
-5	98.04	0.13	0.33
-4	98.44	0.13	0.32
-3	98.83	0.12	0.32
-2	99.22	0.12	0.31
-1	99.61	0.12	0.31
0	100.00	0.12	0.30
1	100.39	0.12	0.31

2	100.78	0.12	0.31
3	101.17	0.12	0.32
4	101.56	0.12	0.32
5	101.95	0.13	0.33
6	102.34	0.13	0.33
7	102.73	0.13	0.34
8	103.12	0.13	0.34
9	103.51	0.13	0.35
10	103.90	0.14	0.35
11	104.29	0.14	0.36
12	104.68	0.14	0.36
13	105.07	0.14	0.37
14	105.46	0.14	0.37
15	105.85	0.15	0.38
16	106.24	0.15	0.38
17	106.63	0.15	0.39

18	107.02	0.15	0.39
19	107.40	0.15	0.40
20	107.79	0.16	0.40
21	108.18	0.16	0.41
22	108.57	0.16	0.41
23	108.96	0.16	0.42
24	109.35	0.16	0.42
25	109.73	0.16	0.43
26	110.12	0.17	0.43
27	110.51	0.17	0.44
28	110.90	0.17	0.44
29	111.29	0.17	0.45
30	111.67	0.17	0.45
31	112.06	0.18	0.46
32	112.45	0.18	0.46
33	112.83	0.18	0.47
34	113.22	0.18	0.47
35	113.61	0.18	0.48
36	114.00	0.19	0.48
37	114.38	0.19	0.49
38	114.77	0.19	0.49
39	115.15	0.19	0.50
40	115.54	0.19	0.50
41	115.93	0.19	0.51
42	116.31	0.20	0.51
43	116.70	0.20	0.52
44	117.08	0.20	0.52
45	117.47	0.20	0.53
46	117.86	0.20	0.53
47	118.24	0.21	0.54
48	118.63	0.21	0.54
49	119.01	0.21	0.55
50	119.40	0.21	0.55
51	119.78	0.21	0.56
52	120.17	0.22	0.56
53	120.55	0.22	0.57
54	120.94	0.22	0.57
55	121.32	0.22	0.58

56	121.71	0.22	0.58
57	122.09	0.22	0.59
58	122.47	0.23	0.59
59	122.86	0.23	0.60
60	123.24	0.23	0.60
61	123.63	0.23	0.61
62	124.01	0.23	0.61
63	124.39	0.24	0.62
64	124.78	0.24	0.62
65	125.16	0.24	0.63
66	125.54	0.24	0.63
67	125.93	0.24	0.64
68	126.31	0.25	0.64
69	126.69	0.25	0.65
70	127.08	0.25	0.65
71	127.46	0.25	0.66

72	127.84	0.25	0.66
73	128.22	0.25	0.67
74	128.61	0.26	0.67
75	128.99	0.26	0.68
76	129.37	0.26	0.68
77	129.75	0.26	0.69
78	130.13	0.26	0.69
79	130.52	0.27	0.70
80	130.90	0.27	0.70
81	131.28	0.27	0.71
82	131.66	0.27	0.71
83	132.04	0.27	0.72
84	132.42	0.27	0.72
85	132.80	0.28	0.73
86	133.18	0.28	0.73
87	133.57	0.28	0.74
88	133.95	0.28	0.74
89	134.33	0.28	0.75
90	134.71	0.29	0.75
91	135.09	0.29	0.76
92	135.47	0.29	0.76
93	135.85	0.29	0.77

94	136.23	0.29	0.77
95	136.61	0.29	0.78
96	136.99	0.30	0.78
97	137.37	0.30	0.79
98	137.75	0.30	0.79
99	138.13	0.30	0.80
100	138.51	0.30	0.80
101	138.88	0.31	0.81
102	139.26	0.31	0.81
103	139.64	0.31	0.82
104	140.02	0.31	0.82
105	140.40	0.31	0.83
106	140.78	0.31	0.83
107	141.16	0.32	0.84
108	141.54	0.32	0.84
109	141.91	0.32	0.85
110	142.29	0.32	0.85
111	142.67	0.32	0.86
112	143.05	0.32	0.86
113	143.43	0.33	0.87
114	143.80	0.33	0.87
115	144.18	0.33	0.88
116	144.56	0.33	0.88
117	144.94	0.33	0.89
118	145.31	0.34	0.89
119	145.69	0.34	0.90
120	146.07	0.34	0.90
121	146.44	0.34	0.91
122	146.82	0.34	0.91
123	147.20	0.34	0.92
124	147.57	0.35	0.92
125	147.95	0.35	0.93
126	148.33	0.35	0.93
127	148.70	0.35	0.94
128	149.08	0.35	0.94
129	149.46	0.36	0.95
130	149.83	0.36	0.95
131	150.21	0.36	0.96

132	150.58	0.36	0.96
133	150.96	0.36	0.97
134	151.33	0.36	0.97
135	151.71	0.37	0.98
136	152.08	0.37	0.98
137	152.46	0.37	0.99
138	152.83	0.37	0.99
139	153.21	0.37	1.00
140	153.58	0.37	1.00
141	153.96	0.38	1.01

142	154.33	0.38	1.01
143	154.71	0.38	1.02
144	155.08	0.38	1.02
145	155.46	0.38	1.03
146	155.83	0.39	1.03
147	156.20	0.39	1.04
148	156.58	0.39	1.04
149	156.95	0.39	1.05
150	157.33	0.39	1.05
151	157.70	0.39	1.06
152	158.07	0.40	1.06
153	158.45	0.40	1.07
154	158.82	0.40	1.07
155	159.19	0.40	1.08
156	159.56	0.40	1.08
157	159.94	0.40	1.09
158	160.31	0.41	1.09
159	160.68	0.41	1.10
160	161.05	0.41	1.10
161	161.43	0.41	1.11
162	161.80	0.41	1.11
163	162.17	0.41	1.12
164	162.54	0.42	1.12
165	162.91	0.42	1.13
166	163.29	0.42	1.13
167	163.66	0.42	1.14
168	164.03	0.42	1.14
169	164.40	0.43	1.15

170	164.77	0.43	1.15
171	165.14	0.43	1.16
172	165.51	0.43	1.16
173	165.89	0.43	1.17
174	166.26	0.43	1.17
175	166.63	0.44	1.18
176	167.00	0.44	1.18
177	167.37	0.44	1.19
178	167.74	0.44	1.19
179	168.11	0.44	1.20
180	168.48	0.44	1.20
181	168.85	0.45	1.21
182	169.22	0.45	1.21
183	169.59	0.45	1.22
184	169.96	0.45	1.22
185	170.33	0.45	1.23
186	170.70	0.45	1.23
187	171.07	0.46	1.24
188	171.43	0.46	1.24
189	171.80	0.46	1.25
190	172.17	0.46	1.25
191	172.54	0.46	1.26
192	172.91	0.46	1.26
193	173.28	0.47	1.27
194	173.65	0.47	1.27
195	174.02	0.47	1.28
196	174.38	0.47	1.28
197	174.75	0.47	1.29
198	175.12	0.47	1.29
199	175.49	0.48	1.30
200	175.86	0.48	1.30
201	176.22	0.48	1.31
202	176.59	0.48	1.31
203	176.96	0.48	1.32
204	177.33	0.48	1.32
205	177.69	0.49	1.33
206	178.06	0.49	1.33
207	178.43	0.49	1.34

208	178.79	0.49	1.34
209	179.16	0.49	1.35
210	179.53	0.49	1.35
211	179.89	0.50	1.36

212	180.26	0.50	1.36
213	180.63	0.50	1.37
214	180.99	0.50	1.37
215	181.36	0.50	1.38
216	181.72	0.50	1.38
217	182.09	0.51	1.39
218	182.46	0.51	1.39
219	182.82	0.51	1.40
220	183.19	0.51	1.40
221	183.55	0.51	1.41
222	183.92	0.51	1.41
223	184.28	0.52	1.42
224	184.65	0.52	1.42
225	185.01	0.52	1.43
226	185.38	0.52	1.43
227	185.74	0.52	1.44
228	186.11	0.52	1.44
229	186.47	0.53	1.45
230	186.84	0.53	1.45
231	187.20	0.53	1.46
232	187.56	0.53	1.46
233	187.93	0.53	1.47
234	188.29	0.53	1.47
235	188.66	0.54	1.48
236	189.02	0.54	1.48
237	189.38	0.54	1.49
238	189.75	0.54	1.49
239	190.11	0.54	1.50
240	190.47	0.54	1.50
241	190.84	0.55	1.51
242	191.20	0.55	1.51
243	191.56	0.55	1.52
244	191.92	0.55	1.52
245	192.29	0.55	1.53
246	192.65	0.55	1.53
247	193.01	0.56	1.54
248	193.37	0.56	1.54
249	193.74	0.56	1.55
250	194.10	0.56	1.55
251	194.46	0.56	1.56
252	194.82	0.56	1.56
253	195.18	0.57	1.57
254	195.55	0.57	1.57
255	195.91	0.57	1.58
256	196.27	0.57	1.58
257	196.63	0.57	1.59
258	196.99	0.57	1.59
259	197.35	0.58	1.60
260	197.71	0.58	1.60
261	198.07	0.58	1.61
262	198.43	0.58	1.61
263	198.79	0.58	1.62
264	199.15	0.58	1.62
265	199.51	0.59	1.63
266	199.87	0.59	1.63
267	200.23	0.59	1.64
268	200.59	0.59	1.64
269	200.95	0.59	1.65
270	201.31	0.59	1.65
271	201.67	0.60	1.66
272	202.03	0.60	1.66
273	202.39	0.60	1.67
274	202.75	0.60	1.67
275	203.11	0.60	1.68
276	203.47	0.60	1.68
277	203.83	0.60	1.69
278	204.19	0.61	1.69
279	204.55	0.61	1.70
280	204.90	0.61	1.70
281	205.26	0.61	1.71
282	205.62	0.61	1.71
283	205.98	0.61	1.72

284	206.34	0.62	1.72
285	206.70	0.62	1.73
286	207.05	0.62	1.73
287	207.41	0.62	1.74
288	207.77	0.62	1.74
289	208.13	0.62	1.75
290	208.48	0.63	1.75
291	208.84	0.63	1.76
292	209.20	0.63	1.76
293	209.56	0.63	1.77
294	209.91	0.63	1.77
295	210.27	0.63	1.78
296	210.63	0.63	1.78
297	210.98	0.64	1.79
298	211.34	0.64	1.79
299	211.70	0.64	1.80
300	212.05	0.64	1.80
301	212.41	0.64	1.81
302	212.76	0.64	1.81
303	213.12	0.65	1.82
304	213.48	0.65	1.82
305	213.83	0.65	1.83
306	214.19	0.65	1.83
307	214.54	0.65	1.84
308	214.90	0.65	1.84
309	215.25	0.66	1.85
310	215.61	0.66	1.85
311	215.96	0.66	1.86
312	216.32	0.66	1.86
313	216.67	0.66	1.87
314	217.03	0.66	1.87
315	217.38	0.66	1.88
316	217.74	0.67	1.88
317	218.09	0.67	1.89
318	218.44	0.67	1.89
319	218.80	0.67	1.90
320	219.15	0.67	1.90
321	219.51	0.67	1.91

322	219.86	0.68	1.91
323	220.21	0.68	1.92
324	220.57	0.68	1.92
325	220.92	0.68	1.93
326	221.27	0.68	1.93
327	221.63	0.68	1.94
328	221.98	0.68	1.94
329	222.33	0.69	1.95
330	222.68	0.69	1.95
331	223.04	0.69	1.96
332	223.39	0.69	1.96
333	223.74	0.69	1.97
334	224.09	0.69	1.97
335	224.45	0.70	1.98
336	224.80	0.70	1.98
337	225.15	0.70	1.99
338	225.50	0.70	1.99
339	225.85	0.70	2.00
340	226.21	0.70	2.00
341	226.56	0.70	2.01
342	226.91	0.71	2.01
343	227.26	0.71	2.02
344	227.61	0.71	2.02
345	227.96	0.71	2.03
346	228.31	0.71	2.03
347	228.66	0.71	2.04
348	229.02	0.72	2.04
349	229.37	0.72	2.05
350	229.72	0.72	2.05
351	230.07	0.72	2.06
352	230.42	0.72	2.06
353	230.77	0.72	2.07

354	231.12	0.72	2.07
355	231.47	0.73	2.08
356	231.82	0.73	2.08
357	232.17	0.73	2.09
358	232.52	0.73	2.09
359	232.87	0.73	2.10

360	233.21	0.73	2.10
361	233.56	0.73	2.11
362	233.91	0.74	2.11
363	234.26	0.74	2.12
364	234.61	0.74	2.12
365	234.96	0.74	2.13
366	235.31	0.74	2.13
367	235.66	0.74	2.14
368	236.00	0.75	2.14
369	236.35	0.75	2.15
370	236.70	0.75	2.15
371	237.05	0.75	2.16
372	237.40	0.75	2.16
373	237.74	0.75	2.17
374	238.09	0.75	2.17
375	238.44	0.76	2.18
376	238.79	0.76	2.18
377	239.13	0.76	2.19
378	239.48	0.76	2.19
379	239.83	0.76	2.20
380	240.18	0.76	2.20
381	240.52	0.76	2.21
382	240.87	0.77	2.21
383	241.22	0.77	2.22
384	241.56	0.77	2.22
385	241.91	0.77	2.23
386	242.26	0.77	2.23
387	242.60	0.77	2.24
388	242.95	0.78	2.24
389	243.29	0.78	2.25
390	243.64	0.78	2.25
391	243.99	0.78	2.26
392	244.33	0.78	2.26
393	244.68	0.78	2.27
394	245.02	0.78	2.27
395	245.37	0.79	2.28
396	245.71	0.79	2.28
397	246.06	0.79	2.29

398	246.40	0.79	2.29
399	246.75	0.79	2.30
400	247.09	0.79	2.30
401	247.44	0.79	2.31
402	247.78	0.80	2.31
403	248.13	0.80	2.32
404	248.47	0.80	2.32
405	248.81	0.80	2.33
406	249.16	0.80	2.33
407	249.50	0.80	2.34
408	249.85	0.80	2.34
409	250.19	0.81	2.35
410	250.53	0.81	2.35
411	250.88	0.81	2.36
412	251.22	0.81	2.36
413	251.56	0.81	2.37
414	251.91	0.81	2.37
415	252.25	0.81	2.38
416	252.59	0.82	2.38
417	252.93	0.82	2.39
418	253.28	0.82	2.39
419	253.62	0.82	2.40
420	253.96	0.82	2.40
421	254.30	0.82	2.41
422	254.65	0.82	2.41
423	254.99	0.83	2.42

424	255.33	0.83	2.42
425	255.67	0.83	2.43
426	256.01	0.83	2.43
427	256.35	0.83	2.44
428	256.70	0.83	2.44
429	257.04	0.83	2.45
430	257.38	0.84	2.45
431	257.72	0.84	2.46
432	258.06	0.84	2.46
433	258.40	0.84	2.47
434	258.74	0.84	2.47
435	259.08	0.84	2.48

436	259.42	0.84	2.48
437	259.76	0.85	2.49
438	260.10	0.85	2.49
439	260.44	0.85	2.50
440	260.78	0.85	2.50
441	261.12	0.85	2.51
442	261.46	0.85	2.51
443	261.80	0.85	2.52
444	262.14	0.86	2.52
445	262.48	0.86	2.53
446	262.82	0.86	2.53
447	263.16	0.86	2.54
448	263.50	0.86	2.54
449	263.84	0.86	2.55
450	264.18	0.86	2.55
451	264.52	0.87	2.56
452	264.86	0.87	2.56
453	265.20	0.87	2.57
454	265.53	0.87	2.57
455	265.87	0.87	2.58
456	266.21	0.87	2.58
457	266.55	0.87	2.59
458	266.89	0.88	2.59
459	267.22	0.88	2.60
460	267.56	0.88	2.60
461	267.90	0.88	2.61
462	268.24	0.88	2.61
463	268.57	0.88	2.62
464	268.91	0.88	2.62
465	269.25	0.88	2.63
466	269.59	0.89	2.63
467	269.92	0.89	2.64
468	270.26	0.89	2.64
469	270.60	0.89	2.65
470	270.93	0.89	2.65
471	271.27	0.89	2.66
472	271.61	0.89	2.66
473	271.94	0.90	2.67


474	272.28	0.90	2.67
475	272.61	0.90	2.68
476	272.95	0.90	2.68
477	273.29	0.90	2.69
478	273.62	0.90	2.69
479	273.96	0.90	2.70
480	274.29	0.91	2.70
481	274.63	0.91	2.71
482	274.96	0.91	2.71
483	275.30	0.91	2.72
484	275.63	0.91	2.72
485	275.97	0.91	2.73
486	276.30	0.91	2.73
487	276.64	0.92	2.74
488	276.97	0.92	2.74
489	277.31	0.92	2.75
490	277.64	0.92	2.75
491	277.98	0.92	2.76
492	278.31	0.92	2.76

493	278.64	0.92	2.77
494	278.98	0.92	2.77
495	279.31	0.93	2.78
496	279.64	0.93	2.78
497	279.98	0.93	2.79
498	280.31	0.93	2.79
499	280.64	0.93	2.80
500	280.98	0.93	2.80

Multiple probes available







PT100/PT1000/DS18B20 thermocouple, thermistor

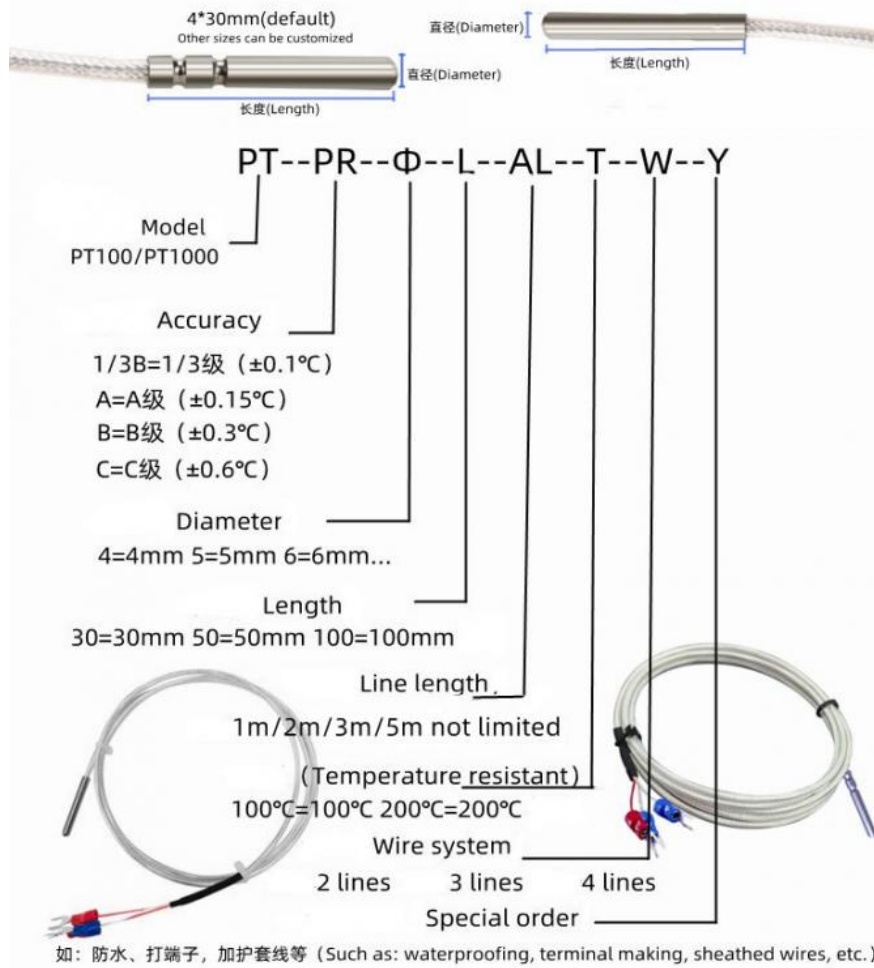

Recommended products:







Dongguan Linkun Electronic Technology Co., Ltd.



13423305709



huangju@lk-ptc.com



lk-thermistor.com

Room 101, No. 21, Huayuanzai Road, Chongmei, Chashan Town, Dongguan City, Guangdong Province